


# PA Centre-Amplifier+FM Tuner+Cassette Player

## BGM-880

80 WATTS ■ AC & 12V DC Operation



- Imported auto reverse cassette player replaceable module.
- 100 preset channels FM tuner with auto/manual tuning.
- Priority on Mic-1 & Telephone inputs.
- Inputs for Mic-2 & CD/Aux.
- Built-in switchable Monitor Speaker & Headphone output.
- Line output for connecting to a booster amplifier for more system power.
- Grab handles.
- Ears for 19" standard rack mounting optional.

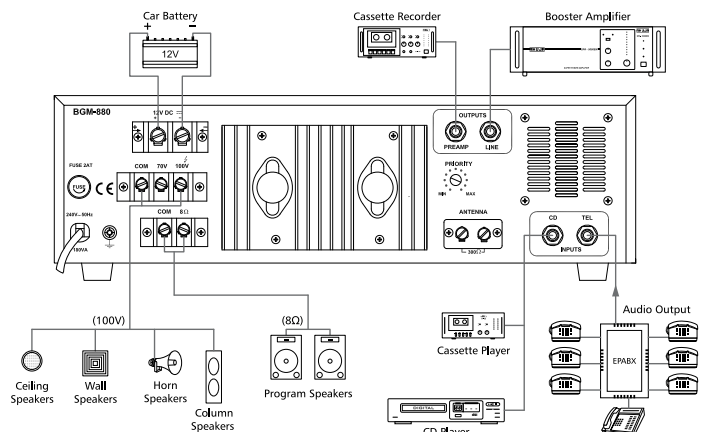

### Background Music & Telephone Paging System for

Offices... Factories... Departmental Stores... Warehouses... Restaurants... Banks... Showrooms... Leisure Centres... Pubs & Clubs...

#### SPECIFICATIONS

POWER OUTPUT	110W Max., 80W RMS at 10%THD, 75W RMS at 5% THD
INPUT CHANNELS	2 × Mic. 0.65mV/4.7kΩ, 1 × CD/Aux, 250mV/470Ω, 1 × Telephone, 150mV/10kΩ (Through Isolation Transformer)
FREQUENCY RESPONSE	50-15,000Hz ±3dB
SIGNAL TO NOISE RATIO	58dB
TONE CONTROLS	Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz
OUTPUTS	Preamp: 200mV/600Ω, Line: 1V/1kΩ, Headphone 1.8mW/8Ω
SPEAKER OUTPUTS	8Ω, 70V & 100V
TUNNING RANGE	FM: 88MHz-108MHz
ANTENNA INPUT	300Ω
TRACK SYSTEM	2 Track, Monaural
WOW & FLUTTER	<0.35% Nominal
POWER SUPPLY	AC: 220-240V, 50/60Hz (110V on request) DC: 12-14V Car Battery
DIMENSIONS	W425 × H137 × D327 mm
WEIGHT	11.3kg