




ASC SERIES

- For Indoor & Outdoor applications such as in Halls, Auditoria, Airport Lounges.
- Weather resistant — for use under roof eaves. Foam layer to protect speakers from dust.
- Array of speakers radiate forward sound beam for wider audience coverage.
- Mounting clamps & hardware supplied.



ASC-40T/ASC-20T



- Column speakers in grey colour for indoor & outdoor applications.
- Aluminium extruded cabinet with die-cast aluminium covers. Aluminium mesh grille in black colour.
- 100V transformer with rotary switch for power tap selection.

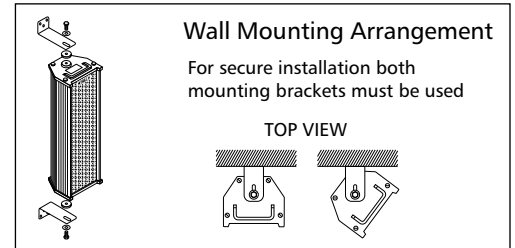

ASC-40T
30W/100V

ASC-320T/ASC-315T/ASC-310T

- Slim, compact, aesthetically designed column speakers.
- Off-white colour to integrate with most interiors.
- Aluminium extruded cabinet with moulded plastic covers, metal mesh grille.
- 100V line matching transformer with rotary switch for power tap selection.



SPECIFICATIONS	ASC-320T	ASC-315T	ASC-310T	ASC-40T	ASC-20T
INPUT POWER	20W RMS 30W Max.	15W RMS 23W Max.	10W RMS 15W Max.	30W RMS 45W Max.	15W RMS 23W Max.
POWER TAPS	20/15/10/5W	15/10/5/2.5W	10/7.5/5/2.5W	30/20/10/5W	15/10/5/2.5W
IMPEDANCE/VOLTAGE	100V	100V	100V	100V	100V
FREQ. RESPONSE	150-15,000Hz	150-15,000Hz	150-15,000Hz	150-10,000Hz	150-10,000Hz
SPL at 1kHz	93dB/1W/1m	91.5dB/1W/1m	90dB/1W/1m	95dB/1W/1m	92dB/1W/1m
SPEAKERS	4 × 5"×3"	3 × 5"×3"	2 × 5"×3"	4 × 6"×4"	2 × 6"×4"
DIMENSIONS(W×H×D)mm	115 × 658 × 89	115 × 524 × 89	115 × 389 × 89	150×910×130	150×465×130
WEIGHT	3.39kg	2.73kg	2.08kg	6.00kg	3.50kg