

ThermoPro™

Guide

TP8 Series

Top-end IR Thermographic Camera


- Rugged and Ergonomical Design
- High-resolution Image Presentation
- Touch Screen
- Bluetooth Voice Control
- Infra Fusion
- Two kinds of Storage Capacity
- Remote control handle
- Productive Auto Focus



- ▶ 110 K IR p
- ▶ Speech Co
- ▶ Magnesi
- ▶ 640x480 C
- ▶ VGA Vide
- ▶ Touch Sc
- ▶ 2GB SD Ca
- ▶ Realtime R
- ▶ Bluetooth



ThermoPro™ TP8 series

Improved on the most advanced IR package available now, integrating multiple technologies never used in the industry, ThermoPro™ TP8 is another ingenious solution Guide IR provides for professional IR thermographers around the world. In a rugged, compact and durable magnalium casing, ThermoPro™ TP8 offers a wide assortment of unexpected features that enable thermographers to work with unprecedented efficiency and productivity. Exceeding all the existing IR radiometric cameras, it sets another new standard of the first-class products for the whole industry.

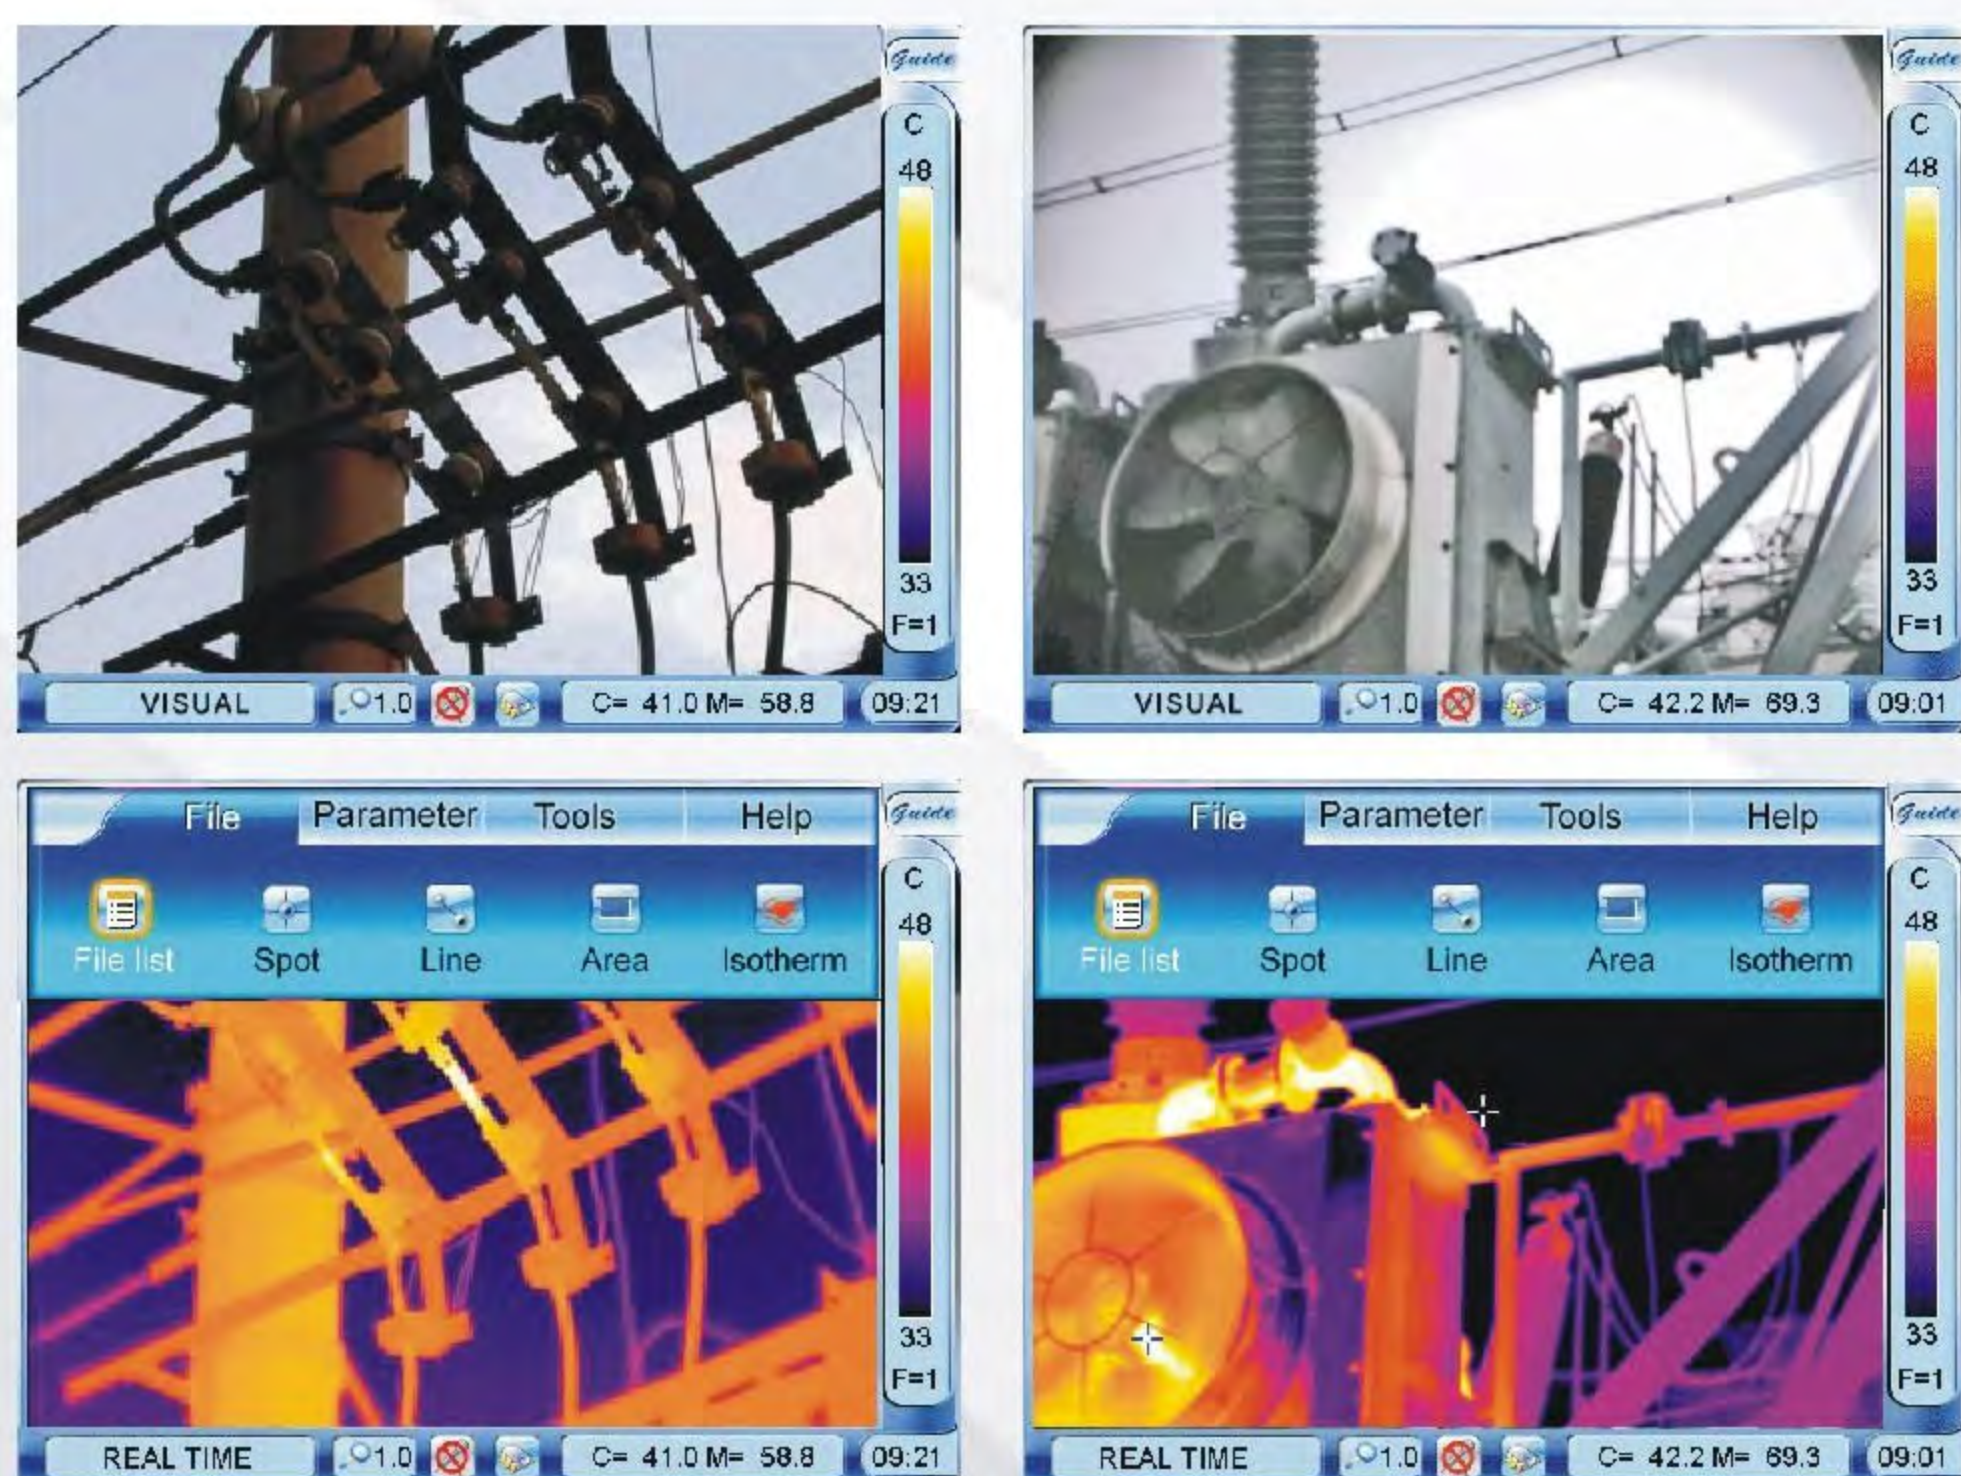

Applications of ThermoPro™ TP8 IR Thermographic Camera

- 1 Predictive and preventative maintenance
- 2 Electricity inspections
- 3 Building diagnostics
- 4 Veterinarian helper
- 5 Research&Development

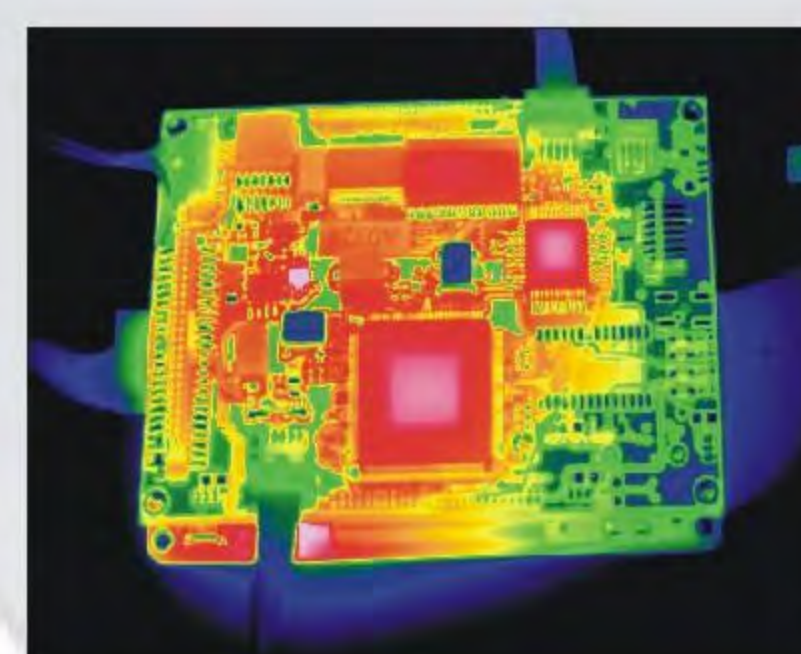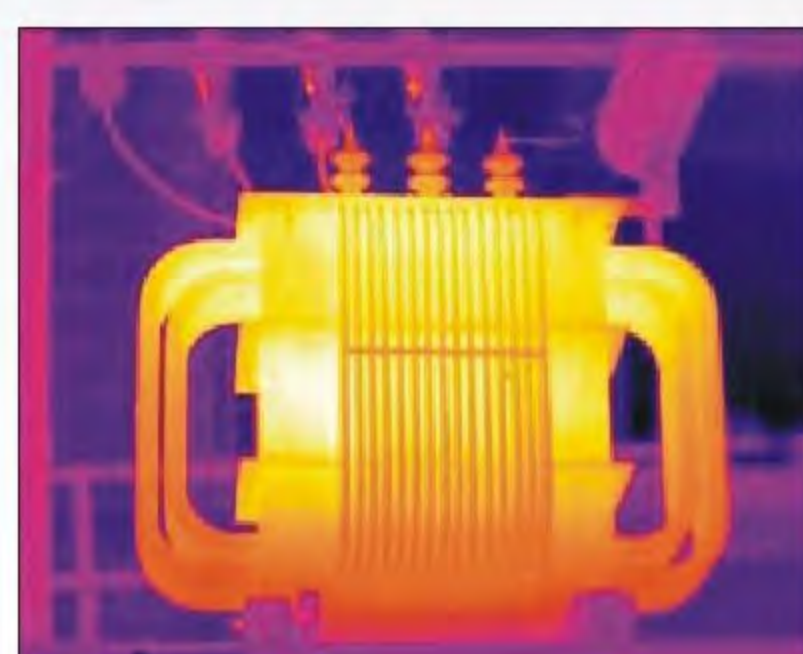

Features and Benefits of ThermoPro™ TP8 IR Thermographic Camera



Rugged and Ergonomical Design

With a rugged, compact and durable magnalium casing, TP8 ensures high work efficiency and reliability in any tough environment.

High-resolution Image Presentation

Utilizing the latest generation high-performance IR detector with over 110000 pixels, the camera offers extraordinary high resolution, high sensitivity and high accuracy presented by real-time, noise-free 16-bit thermal images.



Touch Screen

The 3.5" TFT LCD touch screen delivers more advanced and complicated analysis functions that buttons can never do. It gives great help for pro-level on-board analysis work.

Bluetooth Voice Control

TP8 is the first voice-control infrared camera in the world. The camera can be remotely controlled via bluetooth headset. One camera can be registered with 4 different ID.

Infra Fusion

The new Thermal Fusion Technology allows you to overlay the thermal image directly on the corresponding visual image. It would help you identify where the problem exactly is and give the solution.



Two kinds of Storage Capacity

Benefiting from 2G SD card and xx Uflash, TP8 enables you to save big amount of thermal images without changing card frequently.

Remote control handle

The detachable handle makes inspection work more flexible. User can control the camera via buttons on the handle and look closely on the target at arm's height.



Productive Auto Focus

Manual and auto focus capabilities allow operators great flexibility when adjust images in a range of settings. Auto focus helps new users to be productive sooner.



Image Performance

Detector Type	Focal plane array (FPA) uncooled microbolometer, 384 × 288 pixels, 35 μm
Spectral range	8 ~ 14 μm
Field of View(FOV)	Standard lens 21.7° × 16.4° /35mm Optional wide-angle lens 45.6° × 35° /16mm Optional tele lens 7.7° × 5.8° /100mm
Thermal Sensitivity	≤0.08°C at 30°C

Image Presentation

External Display	3.5" high resolution color VGA LCD, 640 × 480 pixels
Image display	Thermal image alone/ Visual image alone/ Picture in picture/Image fusion

Measurement

Temperature Range	-20°C to 800°C (Up to +2000°C optional)	-20°C to 600°C (Up to +2000°C optional)
Accuracy	±2°C or ±2% of reading	
Measurement Modes	Spot, area, isotherm, line profile, auto hot spot, auto alarm Auto hot/cold spot, auto alarm for temperature above or below; spots, areas displaying either max, min, or average, vertical & horizontal line profile, delta-t, histogram & isotherm in live/zoom/frozen/saved image & video Auto hot spot & auto alarm in live/ zoomed image & video; 10 movable spots, 10 movable & changeable areas displaying either max, min, or average, vertical & horizontal line profile, histogram & isotherm in live/zoomed/frozen/saved image & video	

Image Storage

Type	Removable 2GB SD card or built-in flash memory
Voice Annotation	Up to 60 seconds per file

Laser Locator

Classification Type	Class 2 semiconductor laser
----------------------------	-----------------------------

Power System

Battery Type	Rechargeable Li-ion Camcorder battery, filed-replaceable
Battery Operating time	Over 2.5 hours continuous operation

Environmental Specification

Operating Temperature	-20°C to 60°C
Storage Temperature	-20°C to 60°C
Encapsulation	IP54

Interface

USB 2.0	Image and real-time video transfer to PC Real-time control of the camera on PC	Image transfer to PC
Rs232 Communication	Control of the camera on PC	Control of the camera on PC

Physical Characteristics

Size	186mm × 106mm × 83mm(standard model)
Weight	1.1kg(including battery & LCD)