



# Gooseneck Microphones

## GENERAL PA INSTALLED SOUND SERIES

These professional high quality gooseneck microphones are suitable for various PA applications such as on Lecterns and Podiums, Open Conferences etc. The sleek and slender design makes the microphones unobtrusive. Model GM-601L has a ring LED indication, useful in open conferences; while GM-615 and GM-611 have a longer reach. GM-605 is shorter and of the same length as GM-601L. AGN-500 and AGN-480 are fitted with stand mount base and are supplied with 6 mtrs twin core shielded low noise cable.

- Wide frequency response.
- High front-to-back rejection for more gain before feedback.
- Built-in XLR socket.



**GM-615**



**GM-611**



**GM-605**



**GM-601L**



**AGN-500**



**AGN-480**


Unidirectional Electret Condenser Microphones

Unidirectional Dynamic Microphones

SPECIFICATIONS	GM-615	GM-611	GM-605	GM-601L	AGN-500	AGN-480
FREQUENCY RESPONSE	20-18,000Hz	50-16,000Hz	50-16,000Hz	50-16,000Hz	50-15,000Hz	50-10,000Hz
IMPEDANCE	1kΩ	1kΩ	1kΩ	1kΩ	500Ω	600Ω
SENSITIVITY	7.5mV/Pa	4mV/Pa	4mV/Pa	4mV/Pa	2.2mV/Pa	2.0mV/Pa
POWER SOURCE	1.5V-9V DC	1.5V-9V DC	1.5V-9V DC	3V-9V DC	—	—
OVERALL LENGTH	585mm (23")	585mm (23")	460mm (18")	460mm (18")	395mm (15½")	470mm (18½")

## G-622S

Strong 10" long flexible gooseneck shaft in silver finish. Exclusively designed for converting any XLR microphone into a gooseneck microphone. A female XLR connector is provided at the top for connecting any XLR microphone and a male XLR connector has been provided at the bottom for connecting the microphone cable. Fitted with stand mount base to match all Ahuja PA Microphone Stands.

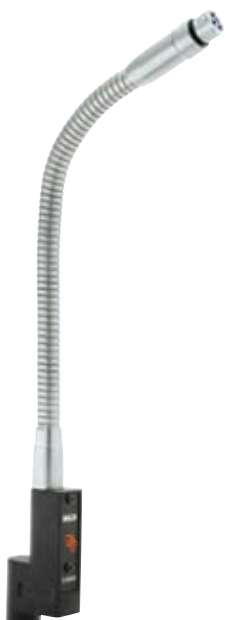

## G-611S

This is a mic stand adaptor for Ahuja gooseneck microphones model GM-615, GM-611 and GM-605. It has a well styled rugged heavy duty aluminium die-cast body with a female XLR connector for directly mounting the gooseneck microphone. A male XLR connector has been provided at the bottom for connecting the cable.



- 10 mtrs. 2-core shielded cable with in-line cell housing.
- Operates on 1.5V (1×UM-3) pencil cell provided.
- Special circuitry employed for minimal switch noise.
- Threaded brass ferrule with 5/8"×27 TPI, suitable for standard microphone stands.

## GMB-6C

This is a sturdy, heavy duty base made of die-cast aluminium suitable for Ahuja electret condenser gooseneck microphones. It has a female XLR connector for directly mounting the gooseneck microphone and a male XLR socket at the rear for connecting standard microphone cable to the amplifier.



- Heavy weight housing with anti-skid feet ensures stability.
- 10 mtrs. shielded 2-core mic cable with XLR connector & ¼" phone plug.
- Built-in cell housing for 2×UM-3 pencil cells (3V) for operating the condenser microphone.
- On/Off switch provided. Special electronic circuitry for minimal switch noise.